



**Off-road and always on track.  
We make missions possible.**

Continental Special Operation Tyres.

- › Durability
- › Traction
- › Endurance



HSO Sand


HCS



## Product Technical Features and Benefits

- **Reinforced belt package:**  
Ensures the stiffness of the overall structure and protects the casing effectively
- **Optimized tread design:**  
Ensures reliable grip both on and off the road
- **Robust carcass:**  
Provides optimal impact protection
- **On-/off-road compound toughness:**  
Increased resistance to cuts, chips and chunks
- **Optimized contour:**  
Enables maximum contact area

### HSO SAND

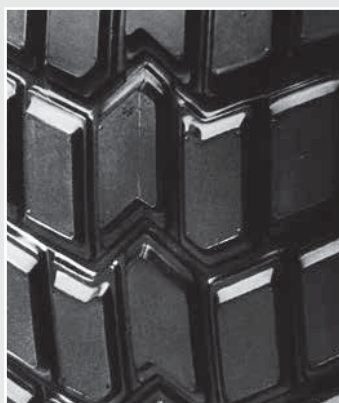

- The king of sand offering exceptional traction and performance on loose and sandy terrain.

### HCS



- Optimal for off-road applications while offering excellent traction in all conditions.

## Technical data

Tyre Size	Operating Code				Rim		Tyre Dimensions						Load capacity (kg) per axle at tire pressure (bar) (psi)														
	Pattern	Load / Speed Index	Speed Index and reference Speed (km/h)	TT/ TL	Rim Width	Distance between Rim Centers	Max. Standard value in service		Design Value		Stat Radius	Rolling circumference	LI	Tyre Fit-ment	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)						
							Width	Outer - Ø	Width + 1%	Outer - Ø ± 1%												± 1.5%	± 2%				
14.00 R 20	HSO SAND	160/157 K	K 110	TL	9.00	414	367	367	1268	370	1238	564	3776	166	S	7275	7850	8420	8975	9525	10065	10600					
	HSO SAND	160/157 K	K 110	TT										164	S	6865	7405	7940	8465	8985	9495	10000					
	HCS	164/160 K (166/160 G)	K 110 (G 90)	TL										160	S	6875	7420	7955	8480	9000	12355	13335	14295	15245	16175	17090	18000
														157	D	12605	13600	14585	15550	16500							
395/85 R 20	HCS	168/- J (166/- K)	J 100 (K 110)	TL	10.00		401	1206	386	1180	540	3599	168	S	7685	8295	8895	9485	10065	10635	11200						
													166	S	7275	7850	8420	8975	9525	10065	10600						