

GENERATION 3. DRIVEN BY YOUR NEEDS.

Technical data and air pressure recommendations

Tire size	Operating code				EU tire label	Rim	Tire dimensions						Load capacity (kg) per axle at tire pressure ⁶⁾ (bar) (psi)									
	Pattern	LI/SI ¹⁾	PR	M+S			Speed index and reference speed (km/h)	TT/TL ²⁾	3)	4)	5)	Min. distance between rim centers	Max. standard value in service	Design value	Stat. radius	Rolling circumference	Tire fitment	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)	
245/70 R 17.5	Conti Hybrid LS3	136/134 M	14	M+S	M 130	TL	C	B	◊ 69	6.75 7.50	270 279	250 258	803	240 248	789	364	2406	136 134	S D	3835 4050	4265 4480	8075 8480
	Conti Hybrid LD3	136/134 M	14	M+S	M 130	TL	D	C	◊ 74													
265/70 R 17.5	Conti Hybrid LS3	139/136 M	14	M+S	M 130	TL	C	B	◊ 69	6.75 7.50	286 295	264 272	831	254 262	817	376	2492	139 136	S D	4160 4395	4625 4860	8535 8960
	Conti Hybrid LD3	139/136 M	14	M+S	M 130	TL	D	C	◊ 74													
205/75 R 17.5	Conti Hybrid LS3	124/122 M	12	M+S	M 130	TL	C	B	◊ 69	5.25 6.00 6.75	222 231 239	205 213 220	765	197 205 212	753	353	2297	124 122	S D	3025 3200	3200 6000	
	Conti Hybrid LD3	124/122 M	12	M+S	M 130	TL	D	C	◊ 74													
215/75 R 17.5	Conti Hybrid LS3	126/124 M	12	M+S	M 130	TL	C	B	◊ 69	6.00 6.75	239 246	220 228	779	212 219	767	359	2339	126 124	S D	3400 6400		
	Conti Hybrid LD3	126/124 M	12	M+S	M 130	TL	D	C	◊ 74													
225/75 R 17.5	Conti Hybrid LS3	129/127 M	12	M+S	M 130	TL	C	B	◊ 69	6.00 6.75	246 254	228 235	797	219 226	783	366	2388	129 127	S D	3500 6620	3700 7000	
	Conti Hybrid LD3	129/127 M	12	M+S	M 130	TL	D	C	◊ 74													
235/75 R 17.5	Conti Hybrid LS3	132/130 M	12	M+S	M 130	TL	C	B	◊ 69	6.75 7.50	262 271	242 251	811	233 241	797	372	2431	132 130	S D	3590 6825	3795 7215	4000 7600
	Conti Hybrid LD3	132/130 M	12	M+S	M 130	TL	D	C	◊ 74													

Data acc. to DIN 7805/4, WdK-Guidelines 134/2, 142/2, 143/14, 143/25
 1) Load index single/dual wheel fitment and speed symbol
 2) TT = Tube Type, TL = Tubeless
 3) Fuel efficiency
 4) Wet grip
 5) External rolling noise (db)
 6) For tire pressures of 8.0 bar (116 psi) or greater, use valve slit cover plate



6FK5G.en 2015.08
 Continental Reifen Deutschland GmbH
 Büttnerstraße 25
 30165 Hannover
 Germany

www.continental-truck-tires.com
 www.continental-corporation.com



Goods

Redefining regional: Conti Hybrid 17.5

Best choice for
light commercial
vehicles

Conti Hybrid LS3/LD3

- › Excellent mileage performance and fuel efficiency
- › Ideal for mixed applications: regional traffic, motorways and urban road conditions



Conti Hybrid LS3

Conti Hybrid LD3



Conti Hybrid for light commercial vehicles.

A new dimension in regional.


GENERATION 3. DRIVEN BY YOUR NEEDS.




Conti Hybrid LS3 / LD3 17.5"

The ever-increasing demands of today's transport market require a new level of versatility for commercial vehicles. The new Conti Hybrid is the perfect solution. With the highest mileage performance and excellent fuel efficiency, it is equally at home on city streets, motorways and uneven roads. With new technical features that support you in achieving your lowest overall driving costs, the comprehensive, cutting-edge tire line Conti Hybrid is redefining regional.

Product highlights

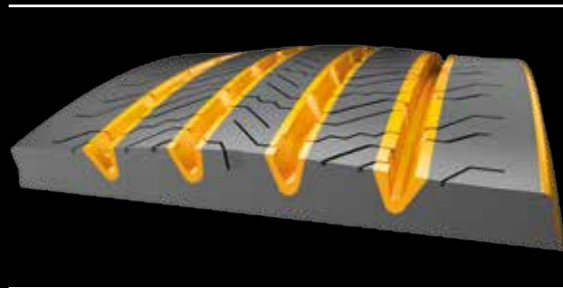

› Plus Volume Pattern: narrowed groove widths result in increased pattern volume which improves wear resistance to guarantee high mileage performance

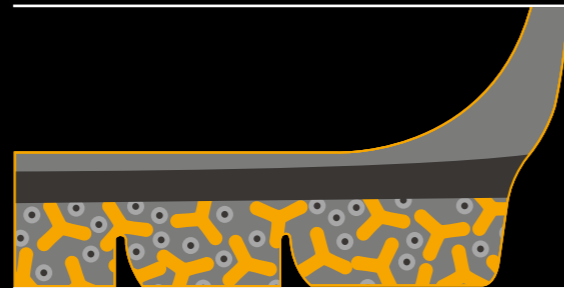


› Two-layer tread construction: combines high mileage performance in the cap compound with significant rolling resistance improvements in the base compound

LifeCycle inbuilt

Continental's premium casing, with Air-Keep inner liner, triangular belt and bead with steel cord chafer, guarantees high retreadability. The Hybrid tire line is perfectly tailored to our ContiLifeCycle.

Conti Hybrid LS3 17.5"


- › 10% improved mileage capabilities compared to predecessor
- › The new siping technology enhances water displacement and improves wet performance
- › M+S marking

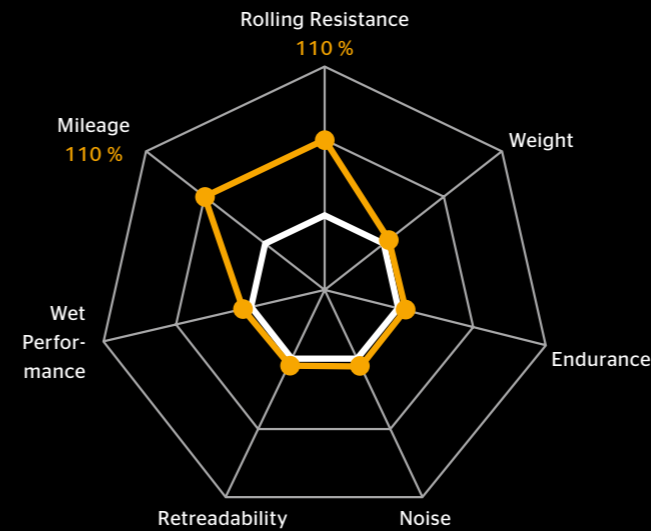

— Conti Hybrid LS3
— Compared to predecessor 215/75 R 17.5

Conti Hybrid LD3 17.5"


- › 13% improved mileage capabilities compared to predecessor
- › The Chamfered Edge reduces deformation amplitude in sidewall and bead area, resulting in improved rolling resistance, helping to lower fuel consumption
- › M+S marking and Three Peak Mountain Snow Flake (3PMSF) symbol

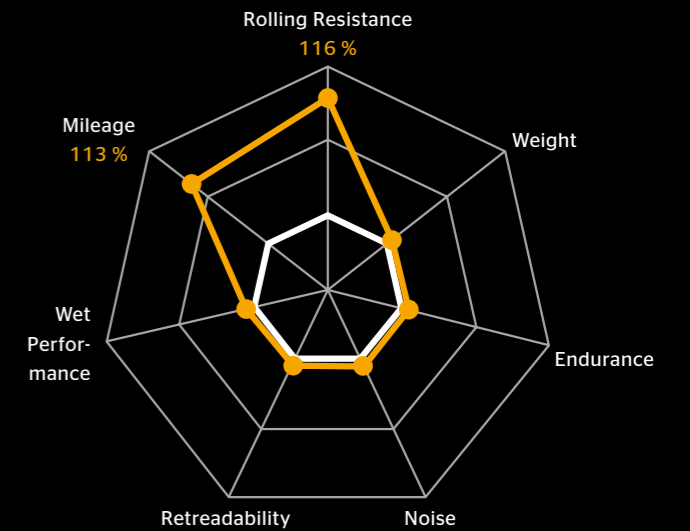

— Conti Hybrid LD3
— Compared to predecessor 215/75 R 17.5


Regrooving recommendations

Conti Hybrid LS3

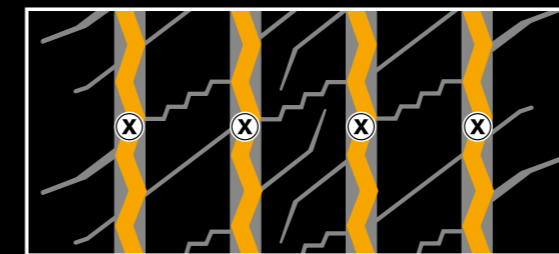

Size	Depth (mm)	Width (mm)
245/70 R 17.5	2.0	5
265/70 R 17.5	2.5	6
205/75 R 17.5	2.5	5
215/75 R 17.5	2.5	6
225/75 R 17.5	2.5	6
235/75 R 17.5	2.5	6

Conti Hybrid LD3

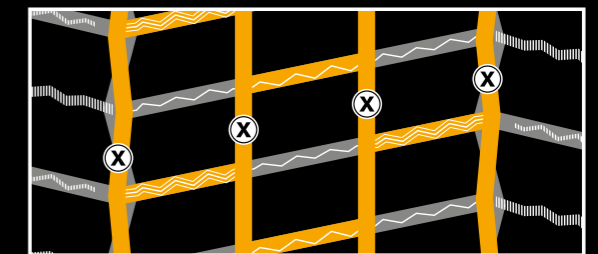

Size	Depth (mm)	Width (mm)
245/70 R 17.5	2.0	5
265/70 R 17.5	2.5	5
205/75 R 17.5	2.5	5
215/75 R 17.5	2.5	5
225/75 R 17.5	2.5	5
235/75 R 17.5	2.5	5